



**赫兹电力**  
HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望

赫兹电力  
HERTZ POWER



HZBB-II

赫兹电力  
HERTZ POWER





**赫兹电力**  
HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望



**赫兹电力**  
HERTZ POWER




PT

CT

|    |      |       |       |      |
|----|------|-------|-------|------|
| √1 |      |       |       |      |
| √1 |      |       |       |      |
| √1 | 8.4V |       |       |      |
| √1 |      |       |       |      |
| √1 |      |       |       |      |
| ◆  | 220V |       | 100   |      |
| ◆  |      |       |       |      |
| ◆  | Z    | PT    | CT    |      |
| ◆  |      | 10000 | 10000 | 0.3% |
| ◆  |      |       |       |      |
| ◆  | 5.6  |       |       |      |
| ◆  |      |       |       |      |
| ◆  |      |       |       |      |



| 变比测试 |                                                                                                                                                                                      |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 量 程  | 0.9 ~ 10000                                                                                                                                                                          |
| 技术指标 |                                                                                                                                                                                      |
| 准确度  | $\pm (\text{读数} \times 0.1\% + 2 \text{ 字})$ (小于等于 500)<br>$\pm (\text{读数} \times 0.2\% + 2 \text{ 字})$ (大于 500 小于等于 3000)<br>$\pm (\text{读数} \times 0.5\% + 2 \text{ 字})$ (大于 3000) |
| 主机重量 | 3.3kg (不含测试线)                                                                                                                                                                        |
| 使用温度 | 10℃ ~ 50℃                                                                                                                                                                            |
| 主机尺寸 | 315mm(长) × 225mm(宽) × 125mm(高)                                                                                                                                                       |
| 相对湿度 | < 90%，不结露                                                                                                                                                                            |

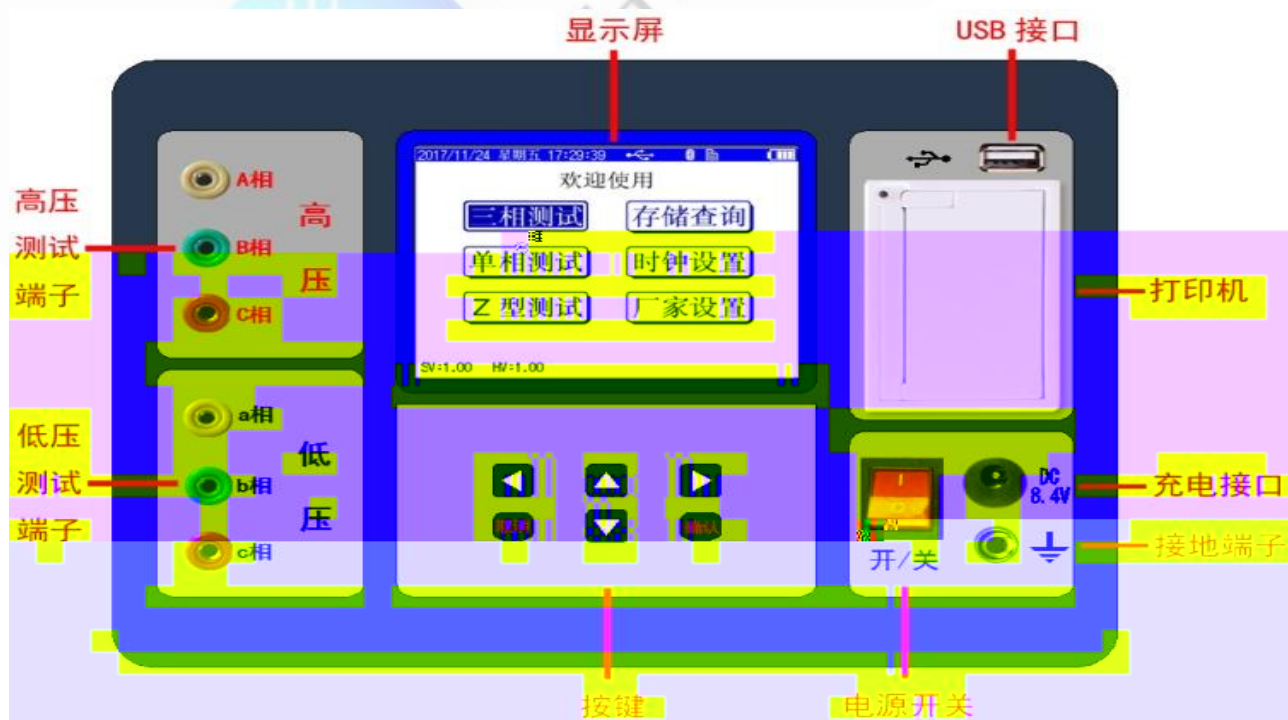



赫兹电力  
HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望

赫兹电力  
HERTZ POWER

10 页




)

( )

(

“ ”

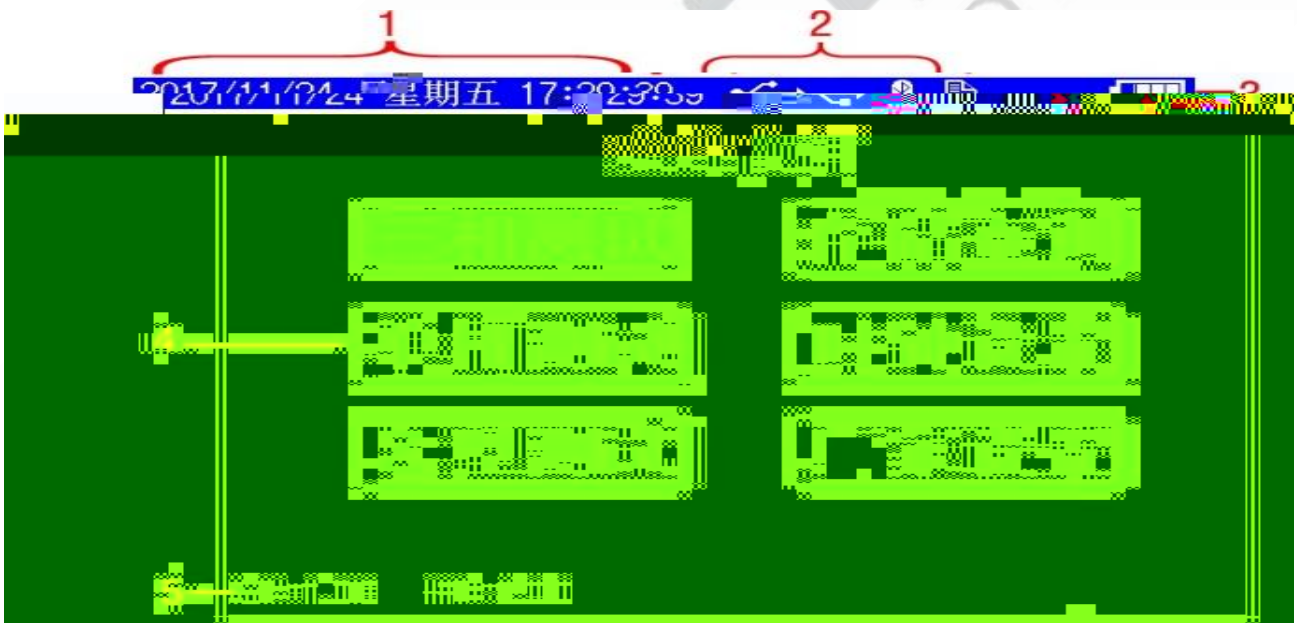

|                                                                                                                                                                                                                                                                   |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                                                                                                                                                                                                                                                                   |  |
|                                                                                                                                                                                                                                                                   |  |
|                                                                                                                                                                                                                                                                   |  |
| <br><br> |  |
|                                                                                                                                                                                                                                                                   |  |



三相测试

单相测试

Z 型测试

存储查询

时钟设置

厂家设置

三相测试

●

●

盲测功能

2017/11/24 星期五 17:33:46



三相测试 > 盲测功能 > 参数设置

试品编号 000000

<说明>

设置试品编号。

额定高压 220.00kV

额定低压 35.000kV

三相 自动

三相 AB

开始测试



”

“ ”

开始测量

注意

注意

“ ”

“ ”

“ ”

“ ”

“ ”



“ ”



“ ” “ ”



服务宗旨：快速响应，达到满意，超过期望

|  |       |
|--|-------|
|  |       |
|  |       |
|  | 16 33 |

“ ”

[illegible]

“ ” “ ” “ ”

保存数据





19

9 10 11

9

12

2

1

Y--d

$\sqrt{3}$  D--y

$\sqrt{3}$

”

“

”

“

1

2

1.



2.

☐ ☐ ☐ ☐

1

2

3

2

24

027-83267669

24

48

4